


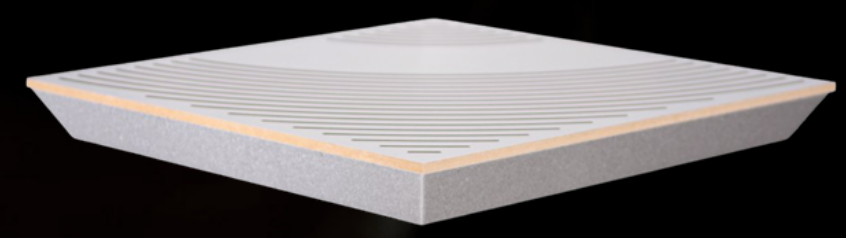


WAWO Acoustic Panel



-  Excellent acoustic performance
-  Custom arrangement options
-  Easy installation



Overview

WAVO is a perforated acoustic wall panel with an exquisite design that gives an excellent indication of sound-absorbing capacity in mid-range frequencies.


This panel with its combination of acoustic foam and perforated MDF face is a highly effective solution for room acoustics in residential and public premises.



Customization

WAVO's impressive design, inspired by the acoustic waves, forms different arrangements which make it suitable for every interior.


Typical wall designs with wavy, circular and semi-circular arrangements of WAVO panels creates modern architectural look.

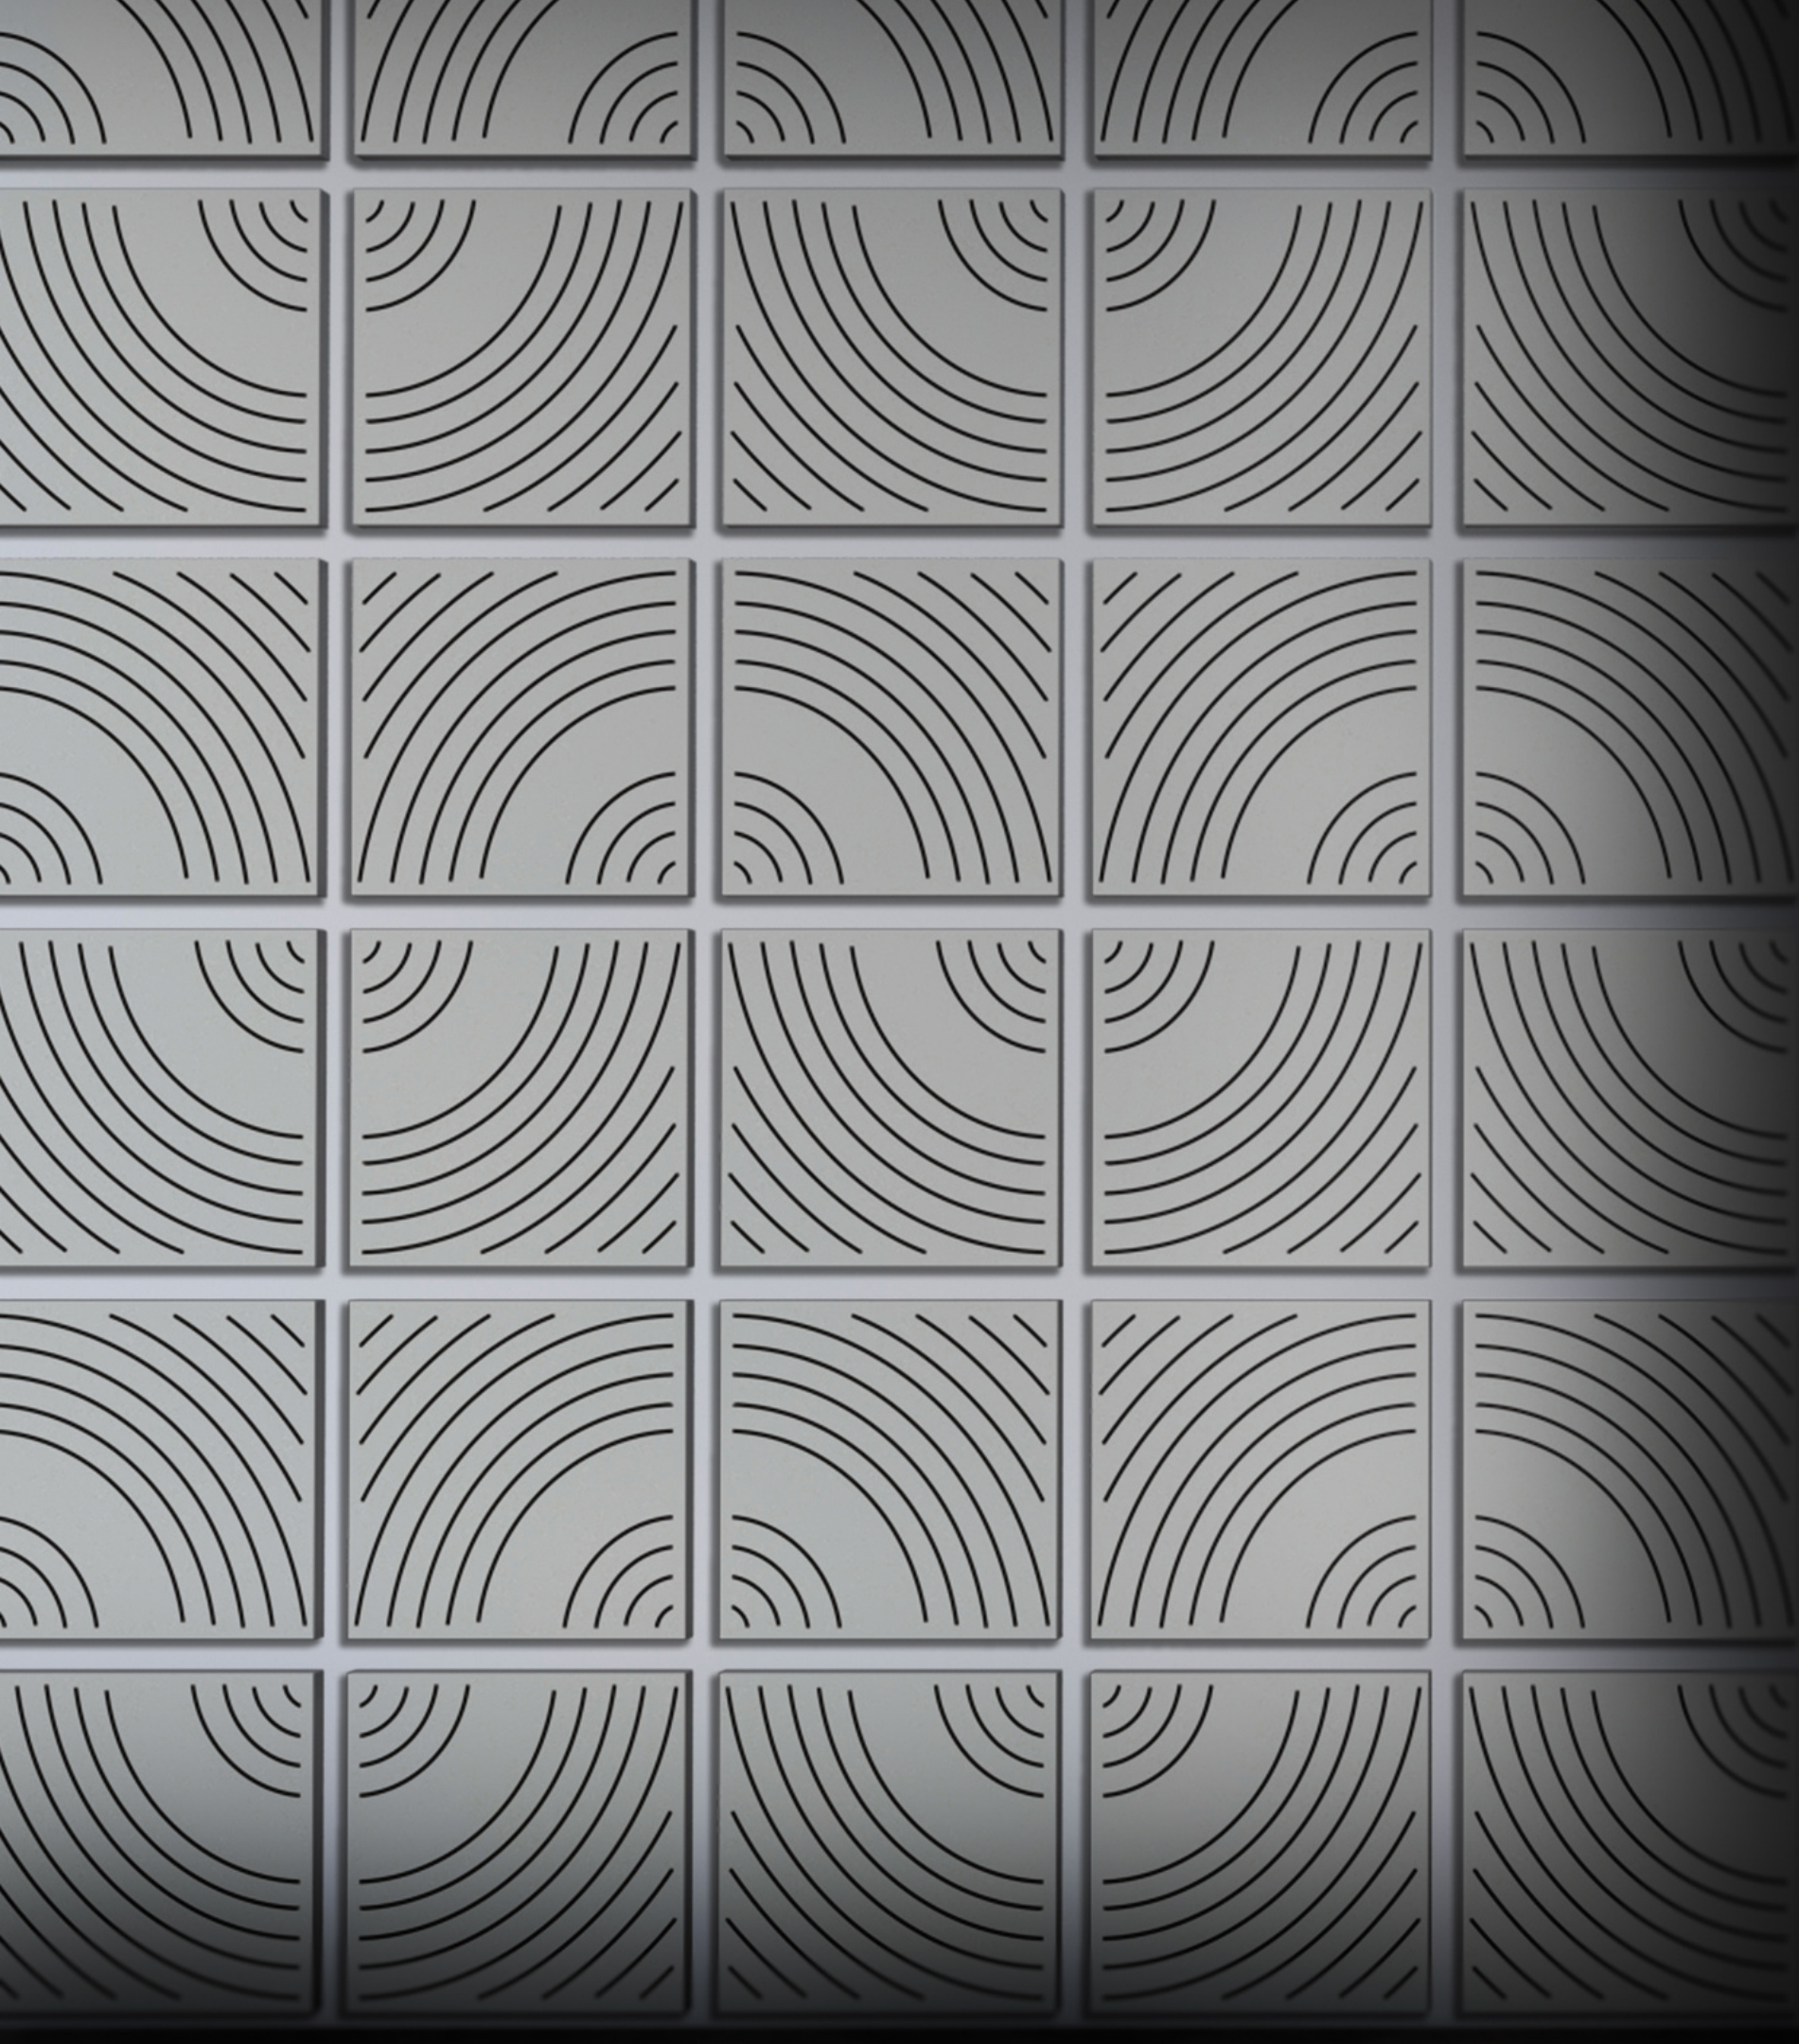

Technical Information

- Material:** Perforated MDF maple finish and acoustic foam
- Color:** V1 & V2 from DECIBEL veneer options
- Dimensions:** 20" x 20"
- Thickness:** 2"
- Weight:** 3.5 lbs per unit
- Perforation:** 10%
- Installation:** Glued on walls or ceilings

Coefficient of Sound Absorption

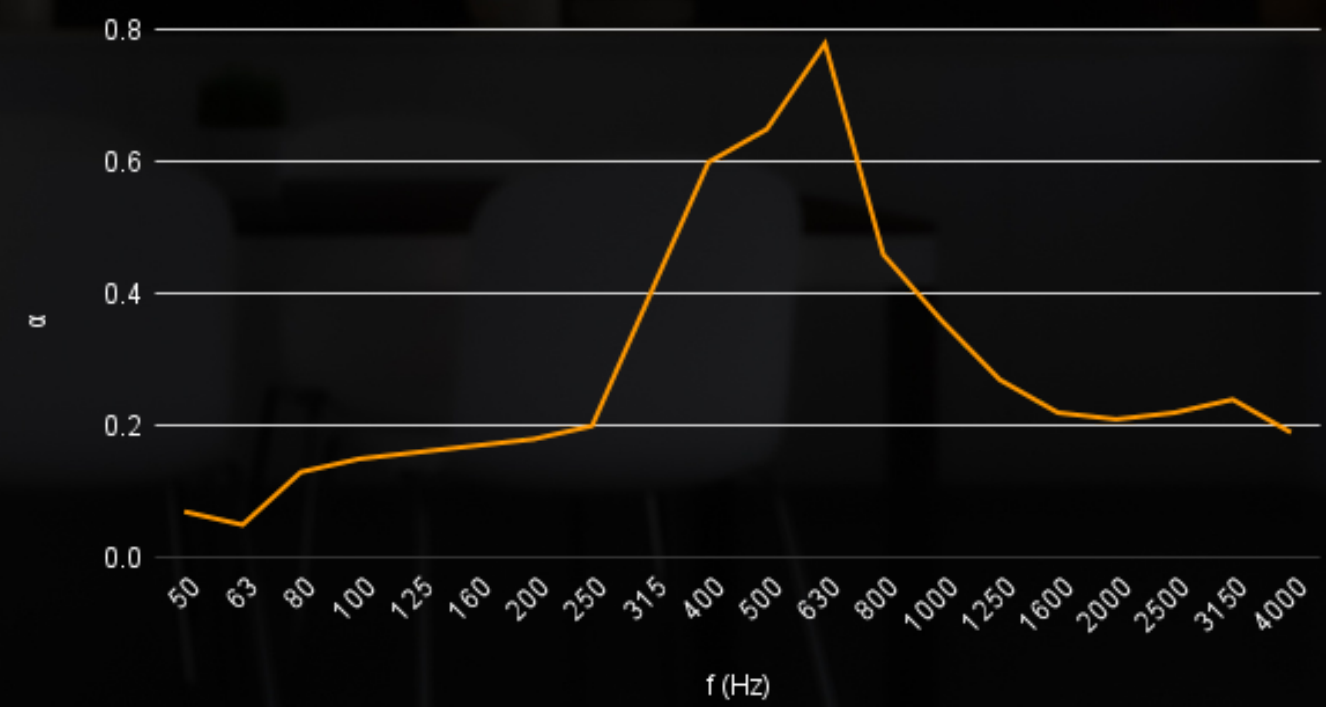

Optimal Packaging

Packaging:	Cardboard box
Box dimensions:	21" x 21" x 21"
Weight:	35 lbs
Contains:	9 pieces
Storage:	Flat-lying indoors in a cool and dry place, non-stackable

Installation

Step 1: Clean the wall to remove dust.

Step 2: Plot a horizontal line to level the panels.

Determine the position of the first panel and plot a vertical line perpendicular to the horizontal, which will serve as the start of the panel arrangement.

Step 3: Apply adhesive on the backside of the panel. Once applied, let the adhesive expand for 30 seconds.

Step 4: Place the panel and press it against the wall for 2 minutes.

Step 5: Subsequent panels are fitted with a little gap between each other.

Leave your panel arrangement to dry for at least 24h.

Do not clean the panels during the drying process.

Do not lean furniture or other heavy items on the newly glued panels.

We advise to prop up the lower level panels with wooden beam during the drying process.

